




PANELS




ARCHITECTURAL METAL PANELS


Trapezoidal Standing Seam Panel

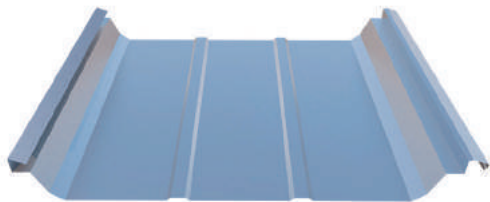


Application: Roof
Coverage Widths: 18", 24"
Minimum Slope: 1/4:12
Gauges: 22, 24
Panel Attachment: Concealed Fastening System, Low, High, Fixed, Sliding, and Stand-off Clips
Finishes: Smooth (standard); Embossed (optional)



Vertical Standing Seam Panel

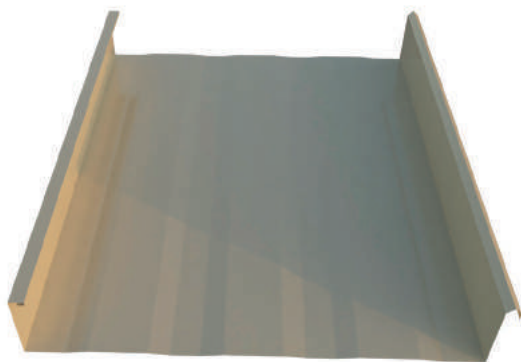

Application: Roof
Coverage Widths: 12", 16"
Minimum Slope: 1/2:12
Gauges: 24 (standard); 22, 26 (optional)
Panel Attachment: Concealed Fastening System, Low, High (fixed or floating), Utility (no insulation clearance) Finishes: Smooth Striated (standard); Embossed Striated (optional)



Architectural Direct Fastened Panel




Application: Wall
Coverage Widths: 36"
Rib Spacing: 12" on Center
Rib Height: 1 & 1/8"
Gauges: 26 (standard); 22, 24, 29 (optional)
Panel Attachment: Exposed Fastening System
Finishes: Smooth (standard); Embossed (optional)




Concealed Fastener Architectural Panel



Application: Wall, Fascia
Coverage Widths: 12"
Gauges: 26 (standard); 22, 20 (optional)
Panel Attachment: Concealed Fastening System
Finishes: Smooth (standard); Embossed (optional)



STANDARD METAL PANELS

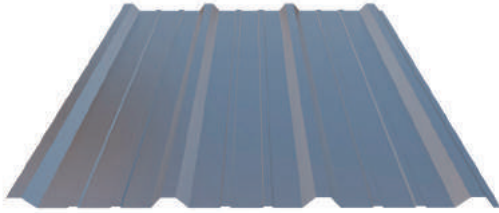


Standard PBR

Application: Wall, Roof, Fascias, Soffit
Coverage Widths: 36"
Rib Spacing: 12" on Center
Rib Height: 1 & 1/4"
Gauges: 26 (standard); 22, 24, 29 (optional) Minimum Slope: 1/2:12
Panel Attachment: Exposed Fastening System
Finishes: Smooth (standard); Embossed (optional)



Corrugated Standard

Application: Wall, Roof, Fascias, Soffit
Coverage Widths: 32"
Rib Spacing: 2.67" on Center
Rib Height: 7/8"
Gauges: 26 (standard); 22, 24, 29 (optional) Minimum Slope: 3:12
Panel Attachment: Exposed Fastening System
Finishes: Smooth (standard); Embossed (optional)

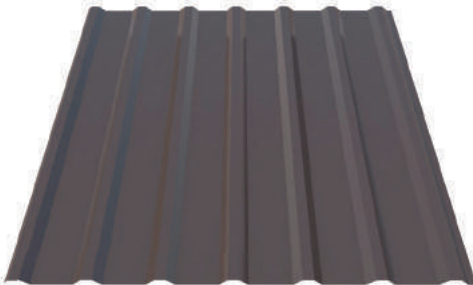

Standard Utility


Application: Wall, Roof, Fascias, Soffit
Coverage Widths: 36"
Rib Spacing: 6" on Center
Rib Height: 3/4"
Gauges: 26 (standard); 22, 24, 29 (optional) Minimum Slope: 1:12
Panel Attachment: Exposed Fastening System
Finishes: Smooth (standard); Embossed (optional)

INSULATED METAL PANELS

Vertical Standing Seam




Application: Roof
Widths: 42" (standard);
30" 36" (optional)
Thickness: 2", 2.5", 3", 4", 5", 6"
Gauges: Exterior: 24, 22;
Interior: 26, 24, 22
Panel Attachment:
Concealed Fastening System
Length: Recommended max. of 50'





Basic Fluted




Enhanced Fluted





Standard Embossed

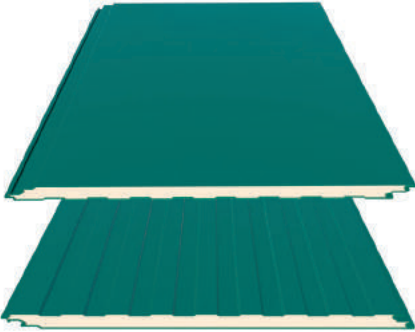


Striated



Textured

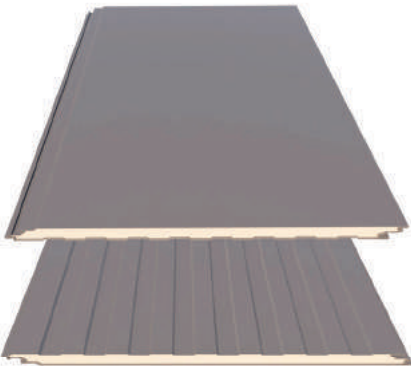


Exposed Fastener Utility




COLOR CHART

Standard Colors (Siliconized Polyester Finish)

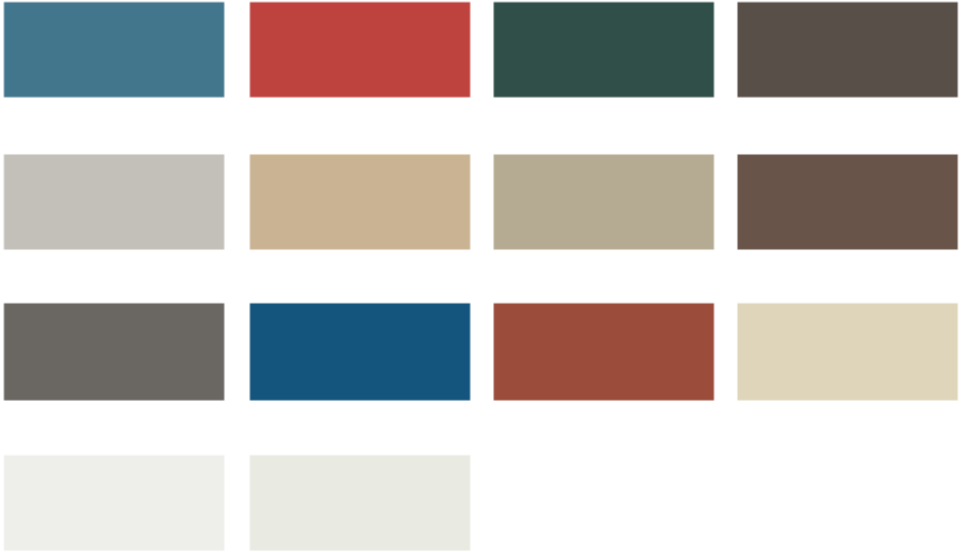

Premium Colors (KYNAR Finish)

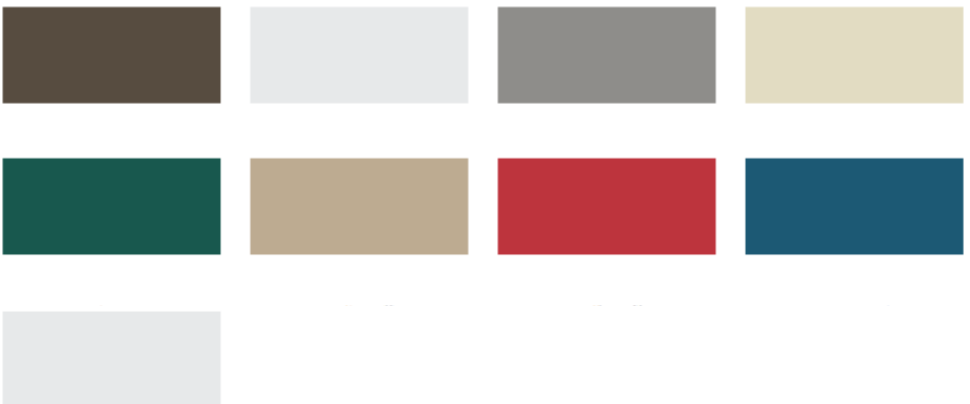

Custom colors available. Standard 20 year coat warranties.